

Technical data Corode filter unit

CF01CM & CF02CM

1800l/h – Filter housing PP or PVDF

Corode unit with magnetic drive pump **CPMD-01**.

Q max :1.8m³/h

Q min :0.2m³/h

Pump head :PP or PVDF

Motor :0.09kW, 230V, 0.48Amp, 1Ph, 50Hz, IP55
Other voltage options and 60Hz available on request.

Filter housing in PP maximum temp 80°C

Filter housing in PVDF maximum temp 100°C

Outside metal SS316

Filter housing: 10" or 20"

Standard units include:

Air release and drain valve

Equipped with on/ off switch


Filter media:

Cartridge

Optional:

Dry run protector

Hand priming pump

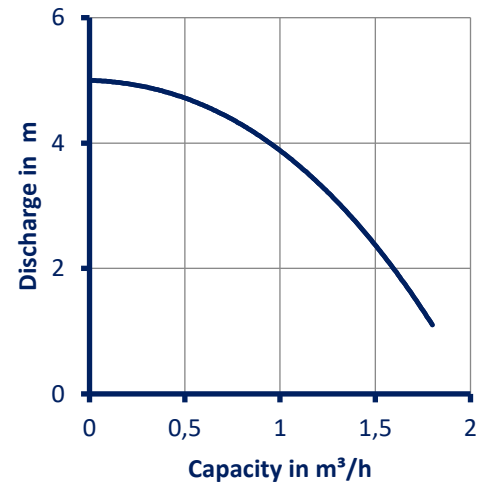

	L in cm	W in cm	H in cm	Connection suction pump	Connection outlet filter unit	Filter media	Filter area in m ²
CF01CM PP or PVDF	30	25	60	Ø19mm	Ø19mm	Cartridge 1x10"	0.33
CF02CM PP or PVDF	30	25	85	Ø19mm	Ø19mm	Cartridge 1x20"	0.66

www.corode.eu

tel: +31 (0)161-244250

corode@corode.nl