

## Technical data Corode filter unit

# CF02C..M Double

### 1800l/h – Filter housing PP

Corode unit with magnetic drive pump **CPMD-01**.

Q max :1,8m<sup>3</sup>/h

Q min :0.2m<sup>3</sup>/h

Pump head :PP

Motor :0.09kW, 230V, 0.48Amp, 1Ph, 50Hz, IP55  
*Other voltage options and 60Hz available on request.*

Filter housing in PP maximum temp 80°C

Outside metal SS316

Filter housing: 10" or 20"

#### Standard units include:

Air release and drain valve

Equipped with on/ off switch


#### Filter media:

Cartridge

#### Optional:

Dry run protector

Hand priming pump

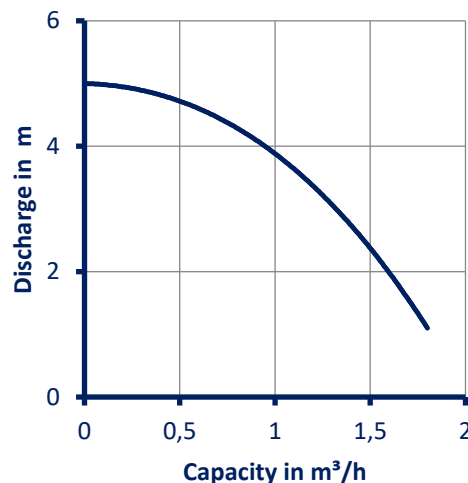

	L in cm	W in cm	H in cm	Connection suction pump	Connection outlet filter unit	Filter media	Filter area in m <sup>2</sup>
<b>CF02C2M PP</b>	30	25	60	Ø19mm	Ø19mm	Cartridge 2x10"	0.66
<b>CF02C22M PP</b>	30	25	85	Ø19mm	Ø19mm	Cartridge 2x20"	1.32

[www.corode.eu](http://www.corode.eu)

tel: +31 (0)161-244250

corode@corode.nl